



Portable Event Flooring





Company



We have 5 different types for you to choose. These temporary interlocking can be used for grass protection, concert, wedding, party, performance to name few. Portable and lightweight flooring is easy to transport, install and store; Slip-resistant, self-draining and fireproof can keep the surface safe and clean; The warranty time of the floor is 5 years, so that can be either sold or rented for further added-value.

Certification

Quality management system

Certificate No. 3002201143285

Certificate of Certification

Awarded to: **Shenzhen Flyon Sports Co., Ltd.**
 143 Shuangshan Road, Bao'an District, Shenzhen, Guangdong, China

Approved by: **Beijing Zhongxing Certification Co., Ltd.**

This certificate is valid for three years from January 26, 2022 to January 25, 2025.

Beijing Zhongxing Certification Co., Ltd.

Shenzhen Flyon Sport Equipment Company

| | |
|-------------------|--|
| MODULE SIZE | 80 cm x 80 cm x 4.5cm |
| WEIGHT | 6.8kg/Tile |
| WEIGHT BEARING | 200Tons/agg. |
| MATERIAL | High-impact Polypropylene Composite with added UV inhibitors |
| UV RESISTANCE | ISO 4892-2:19(9)E |
| FREELATING | UL94HB (UL-20G0V0H) |
| CONNECTION SYSTEM | Interlocking Design each lock snap into connect parameter panels |

Electro Wire Shot View:

SGS TEST REPORT

No.: S22022001010914PL_01
 Date: 2022/06/12
 Page: 1 of 4

Remarks:
 N/A - Not Applicable
 DM - DM not applicable


Photo Appendix:

Approve information:
 The test method was carried out by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch



Production

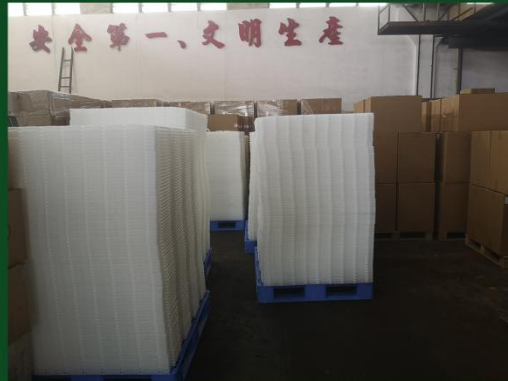

Exhibition

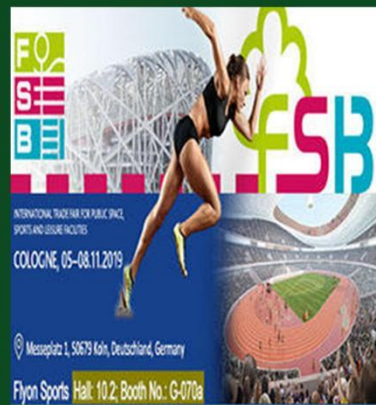



PORTABLE EVENT FLOORING

Roller Cover


- ※ Size: 30.48cm x 10.16cm x 1.8cm
- ※ Weight: 120g/tile
- ※ Raw Material: PP (High Impact Resistance)
- ※ Color available: Gray, Blue and customized
- ※ Fire rating: UL 94HB/ UL 94 V-2 (Optional)
- ※ Load Capacity: 5 Tons/Sq.m
- ※ UV Resistance: ISO 4892:2013 (E)
- ※ Connection system: Unique Rolling Design.
- ※ One locking buckle on each edge.
- ※ Each locks snap in to connect perimeter panels.
- ※ Warranty: 5 Years



INSTALLATION GUIDE



1. Take flooring to turf by little handcart or fork truck

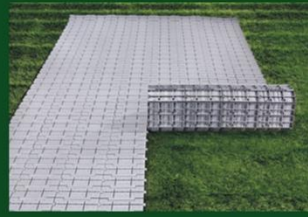

2. Roll out the flooring on the turf



3. Connect the flooring with the pins one by one



4. Press the pin to snap into the floor beside by thumbs or little wood hammer



5. Accomplish quickly and easily







6. Perfect performance



IKA Cover

- ※ Size: 30.48cm x 10.16cm x 1.8cm
- ※ Weight: 120g/tile
- ※ Raw Material: PP (High Impact Resistance)
- ※ Color available: Gray, Blue and customized
- ※ Fire rating: UL 94HB/ UL 94V-2 (Optional)
- ※ Load Capacity: 20 Tons/Sq. m
- ※ UV Resistance: ISO 4892:2013 (E)
- ※ Connection system: Unique Rolling Design.
- ※ One locking buckle on each edge.
- ※ Each locks snap in to connect perimeter panels.
- ※ Warranty: 5 Years

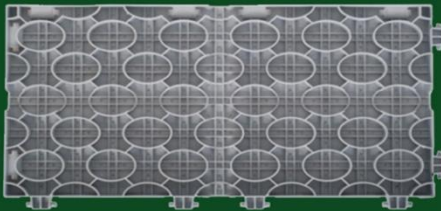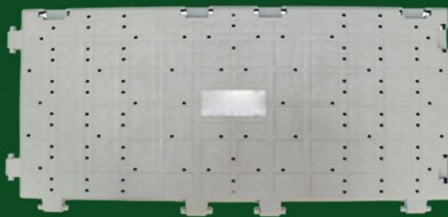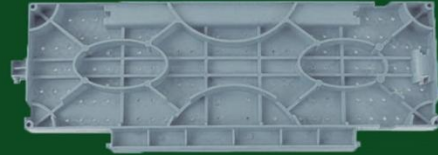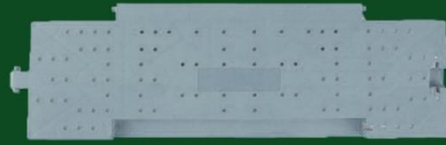


Chang Deck

- ※ Size: 60cm x 30cm x 2.8cm
- ※ Weight: 1.07kg/tile
- ※ Surface: Holes or no holes are available
- ※ Raw Material: PP (High Impact Resistance)
- ※ Color available: Gray, Blue and customized
- ※ Fire rating: UL94HB /UL 94V-2(Optional)
- ※ Load Capacity: 60 Tons/Sq.m
- ※ UV Resistance: ISO 4892:2013 (E)
- ※ Connection system: Interlocking Design.
- ※ Each locks snap in to connect perimeter panels.
- ※ Warranty: 5 Years



Heavy Deck

- ※ Size: 91.6cm*22.6cm*3.53cm
- ※ Weight: 1.98kg/tile
- ※ Raw Material: PP (High Impact Resistance)
- ※ Color available: Gray, Blue and customized
- ※ Fire rating: UL 94HB /UL 94V-2(Optional)
- ※ Load Capacity: 160 Tons/Sq.m
- ※ UV Resistance: ISO 4892:2013 (E)
- ※ Connection System: Interlocking Design.
- ※ Each locks snap in to connect perimeter panels.
- ※ Warranty: 6 Years
- ※ Accessories size: A. 45.2cm*5cm*3.3cm
B. 30.48cm*4cm*1.8cm

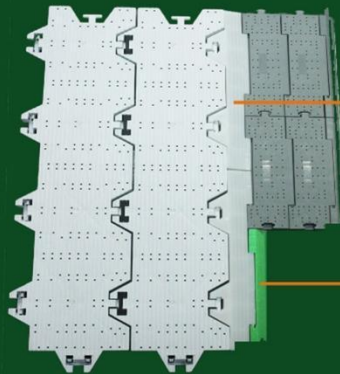

A



B





2018 Russia World Cup FIFA Fan Fest Project






Max Deck

- ※ Size: 100cm*50cm*5cm
- ※ Weight: WITHOUT 6.5KG/PC, WITH CABLE CHANNEL 7.2KG/PC
- ※ Raw Material: PP (High Impact Resistance)
- ※ Color available: Gray, Blue and customized
- ※ Fire rating: UL 94HB /UL 94V-2(Optional)
- ※ Load Capacity: 200 Tons/Sq.m
- ※ UV Resistance: ISO 4892:2013 (E)
- ※ Connection System: Interlocking Design.
- ※ Each locks snap in to connect perimeter panels.
- ※ Warranty: 6 Years

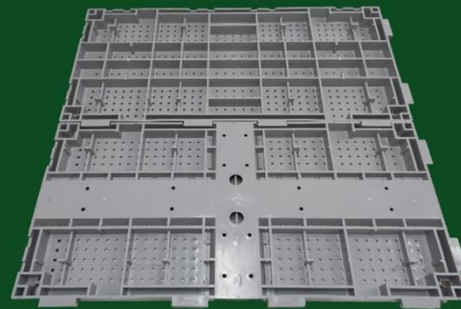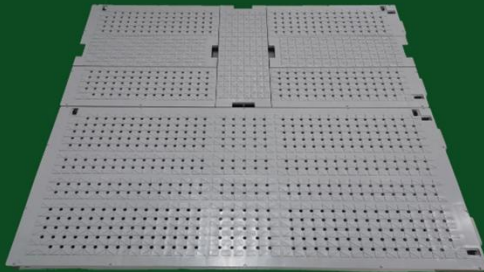

Ordos Sports Stadium Exhibition Covering


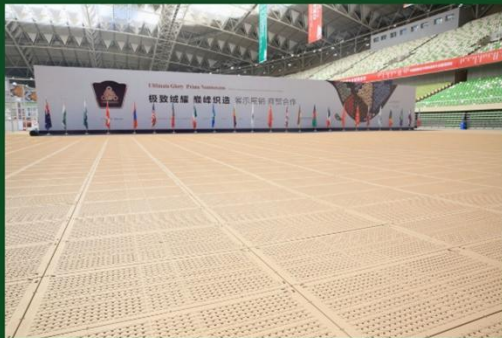


Loading Capacity



Honor

- ※Size: 100*100*6cm (+/-3%) 1pc=1sq.m
- ※Weight: 12330g/pc(+/-3%)
- ※Material: 100% NEW High-density polyethylene (HDPE) added UV inhibitor
- ※Color Available: Translucent and All
- ※Fire Rating: UL94HB or UL94 V-2
(also approved by BS5287 1988 BS4790, GB 8624-2012 B1S1, EN13501 Cfl-S1 rating) optional
- ※UV Resistance: 1500 hours aged test result: No obvious discoloration, No powdering, No cracks, gray card color rating 4.
- Pass temperature test: -40 °C and 70°C, stay for 24hours
- ※ Load Capacity: 260 tons/ Sq.m
- ※Unique rotary knob connection systems with patent locking design Directly lay on the grounds need to cover. Keep all the tiles in same direction.

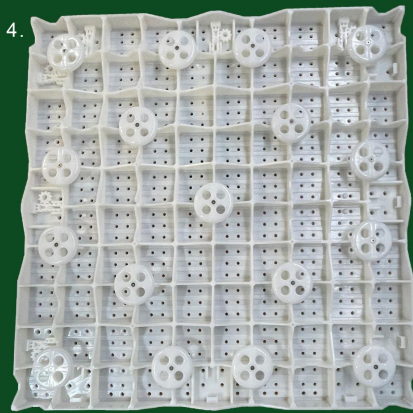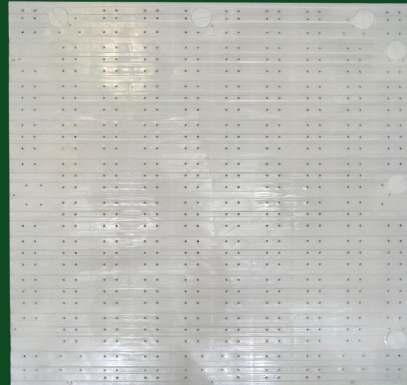

EVENT PROTECTION FLOORING FEATURE

- Interlocking, portable, modular surface
- Anti-slip texture
- UV resistant colors
- Economical to use
- Protects sub-surface
- Drainage channels to minimize flow of Liquids and debris. Holes on top provide water and air for natural turf
- Special locking tabs to create a seamless floor to avoid gaps and tripping
- Effective in all weather and temperature conditions
- On most ground surfaces can use for cars and heavy vehicles like truck to run. For protection of grass, synthetic turf, running tracks, ice rinks, tennis courts and other synthetic surfaces.
- Suitable for heavy weight demands of indoor and outdoor events: Concerts, Construction, Heavy vehicle garage, Tactical operations centers, Exhibitions, Festivals.
- Flexible connection system prevents breakage.





Project





Tent/ Wedding/ Concert Show Flooring



Turf Protection Flooring



Event Flooring



Feature

- Anti-Slip
- UV Resistant Color
- Environmental Friendly
- Protects Sub-Surface
- Drainage Channels
- Effective In All Weather And Climate

Certificate

- CE
- INTERTEK
- ISO
- ISO 9001
- ISO 14001
- ISO 4892:2013 (E)

Color Options

